

OUTDOOR LIGHTING




GOBO LIGHTS | BULLER S/M, BULLER L/XL,
BULLER METEOR / FIREFLY, BULLER WATERMARK S/M,
BULLER PATTERN S/M, BULLER SHADOW S/M

BULLER S/M

Waterproof GOBO spotlight



Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Grey, RAL
Beam angle:	4,5-45°
IES protection classes:	Class I (SELV)
Color temperature, K:	RGBW
Input voltage, V:	220V
Control system:	DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	4-14,5kg



Kaleidoscope effect with different colors of the final abstract image. Includes dynamic. Used in parks, public spaces and to illuminate building facades. Recommended installation height 2.5-4m

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
369350115	BULLER S 40W DMX-512 220V IP66	40W	D190x265	220V	4,5-45°	RGBW	8,5kg
369350120	BULLER M 80W DMX-512 220V IP66	80W	D290x310	220V	4,5-45°	RGBW	10kg

BULLER METEOR / FIREFLY

Waterproof GOBO spotlight

Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Grey, RAL
Beam angle:	60x120°
IES protection classes:	Class I (SELV)
Color temperature, K:	RGBW
Input voltage, V:	220V
Control system:	DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	4-14,5kg



Glowing dots effect. Used in parks, public spaces and to illuminate building facades



Meteor shower effect. Used in parks, public spaces and to illuminate building facades. Used in parks, public spaces and to illuminate building facades


Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
369350135	BULLER METEOR 25W(+3W LASER) DMX-512 220V IP66	25W	D190x170	220V	60x120°	RGB/W	4kg
369350140	BULLER FIREFLY 25W(+3W LASER) DMX-512 220V IP66	25W	D190x170	220V	>60°	R,G,B,W	4kg

BULLER L/XL

Waterproof GOBO spotlight



Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Grey, RAL
Beam angle:	4,5-45°
IES protection classes:	Class I (SELV)
Color temperature, K:	RGBW
Input voltage, V:	220V
Control system:	DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	4-14,5kg




Kaleidoscope effect with 4.5-45° magnification and different colors of the final abstract image. Includes dynamic rotation. Used in parks, public spaces and to illuminate building facades

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
369350125	BULLER L 240W DMX-512 220V IP66	240W	D270x410	220V	4,5-45°	RGBW	13.5kg
369350130	BULLER XL 300W DMX-512 220V IP66	300W	D270x410	220V	4,5-45°	RGBW	14.5kg

BULLER WATERMARK S/M

Waterproof GOBO spotlight

Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Grey, RAL
Beam angle:	-
IES protection classes:	Class I (SELV)
Color temperature, K:	RGBW
Input voltage, V:	220V
Control system:	DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	4-14,5kg

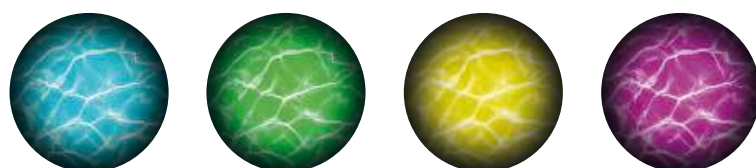

Dynamic water ripple effect. Used in parks, public spaces, bridges, walking areas



Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
369350145	BULLER WATERMARK S 40W DMX-512 220V IP66	40W	D190x295	220V	-	R, G, B, W	5kg
369350150	BULLER WATERMARK M 80W DMX-512 220V IP66	80W	D260x340	220V	-	R, G, B, W	8,3kg

BULLER PATTERN S/M

Waterproof GOBO spotlight



Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Grey, RAL
Beam angle:	-
IES protection classes:	Class I (SELV)
Color temperature, K:	RGBW
Input voltage, V:	220V
Control system:	DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	4-14,5kg



Customizable different kinds of patterns. Used in parks, public spaces, bridges, walking areas

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
369350155	BULLER PATTERN S 40W DMX-512 220V IP66	40W	D190x295	220V	-	R, G, B, W	5kg
369350160	BULLER PATTERN M 80W DMX-512 220V IP66	80W	D260x340	220V	-	R, G, B, W	8,3kg

BULLER SHADOW S/M

Waterproof GOBO spotlight

Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Grey, RAL
Beam angle:	-
IES protection classes:	Class I (SELV)
Color temperature, K:	RGBW
Input voltage, V:	220V
Control system:	DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	4-14,5kg



Ripple effect with customizable different kinds of patterns. Used in parks, public spaces, bridges, walking areas



Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
369350165	BULLER SHADOW S 40W DMX-512 220V IP66	40W	D190x295	220V	-	R, G, B, W	5kg
369350170	BULLER SHADOW M 80W DMX-512 220V IP66	80W	D260x340	220V	-	R, G, B, W	8,3kg